



Industrial IP Modem

M240 V4



Introduction

M240 V4 Series Industrial IP MODEM is an IoT wireless data terminal, using public cellular network to provide users with wireless long distance data transmission. The product supports RS232 and RS485 interfaces, which can be directly connected to serial devices to achieve transparent data transmission function. Low power consumption design, provide 2 ADC, 3 DI/DO, can realize the functions of digital input/output, pulse output, analog input, pulse counting, etc. This product has been widely used in the M2M industry in the IoT industry chain.



Industrial-grade Design

- ▶ High-performance industrial-grade CPU
- ▶ High-performance industrial-grade wireless communication module
- ▶ Low power design
- ▶ Metal casing, IP30 protection level, suitable for most industrial control applications.
- ▶ Wide range power input (DC 5~36V)



Stability & Reliability

- ▶ Watch dog design
- ▶ Anti-drop mechanism
- ▶ RS232/RS485 with built-in 15KV ESD
- ▶ SIM/UIM card slot with built-in 15KV ESD
- ▶ Power interface with built-in phase-reversal and over-voltage protection
- ▶ Antenna interface with lightning protection (optional)



Standard & Convenience

- ▶ 1 x RS232 and 1 x RS485
- ▶ Provide 3 x DI/DO + 2 x ADC (DI/DO can be customized to pulse counting)
- ▶ Supports customize TTL, ADC
- ▶ Industrial terminal interface
- ▶ Multiple work mode
- ▶ Easy configurations
- ▶ Support serial upgrade
- ▶ Central Management Software (Optional)



Tel : +86 592 6101492

Web : www.yifanwireless.com

V1.0.1 Copyright © Yifan 2017

Industrial IP Modem M240 V4 Series



High Performance

- ▶ Embedded standard TCP/IP protocol stack, support transparent data transmission
- ▶ Supports TCP server
- ▶ Support multi data centers and it can support 5 data centers at the same time
- ▶ Support double data centers, one main and another backup
- ▶ Support access to the center based on domain name and IP address
- ▶ Supports APN
- ▶ Multiple offline trigger modes, Including SMS, phone ringing, serial port data trigger online and offline mode

Product Specification

| Cellular Specification | |
|------------------------|--|
| Items | Contents |
| Standard and Band | LTE FDD: B1/B3/B5/B7/B8/B20/B28 B1/B2/B3/B4/B5/B7/B8/B28 (Optional), B2/B4/B5/B12/B13/B17/B66/B71 (Optional) LTE TDD: B38/B39/B40/B41 HSPA+/HSUPA/HSDPA/WCDMA/UMTS 2100/1900/900/850MHz EV-DO: BC0 CDMA 1x: BC0 GPRS/GSM 850/900/1800/1900MHz |
| Bandwidth | LTE CAT4: 150Mbps(DL), 50Mbps(UL) LTE CAT1 : 10Mbps(DL) , 5Mbps(UL) DC-HSPA+: 42Mbps(DL), 5.76 Mbps(UL) HSPA+: 21Mbps(DL), 5.76 Mbps(UL) EVDO Rev. A : 3.1Mbps(DL), 1.8Mbps(UL) GPRS: 85.6kbps(DL) , 85.6kbps(UL) |
| Transmit Power | < 23dBm (CAT4 Version) LTE FDD/TDD : 23±1 dBm, GSM 900 : 32.5±1 dBm, DCS 1800 : 29.5±1 dBm (CAT1 version) GSM850/900 : <33dBm, GSM1800/1900 : <30dBm (GPRS Version) |
| Sensitivity | < -98dBm (CAT4 Version) FDD/TDD : -98+1 dBm, GSM 900 : -109.5 dBm, DCS 1800 : -108 dBm (CAT1 Version) <-108dBm (GPRS Version) |


Industrial IP Modem M240 V4 Series



| Hardware System | |
|-------------------|--|
| Items | Contents |
| CPU | Industrial-grade 32-bit communication processor |
| Flash | 512KB (Can customize to 8MB) |
| DDR2 | 256KB |
| Interfaces | |
| Items | Contents |
| Serial | 1 x RS232 + 1 x RS485, with 15KV ESD protection Data bit: 5, 6, 7, 8 Stop bit: 1, 1.5, 2 Check : None, Even, Odd Baud rate: 1200~230400 bits/s |
| LED Indicators | "PWR", "Online", "System" |
| Antenna Interface | Cellular: Standard SMA female antenna interface, characteristic impedance: 50 Ω |
| SIM/UIM Slot | Standard SIM card slot, support 1.8V/3V SIM/UIM card, built-in 15KV ESD |
| Power Interface | Terminal |



Terminal Block

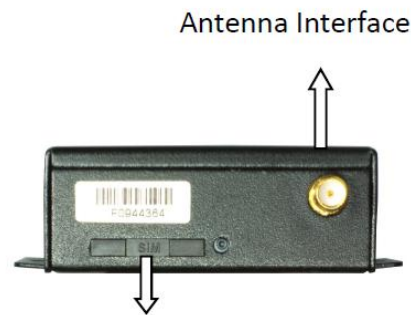

Antenna Interface

Note: There may be differences between models of accessories and interfaces, actual products shall prevail.


| Power | |
|------------------------------|-------------------------|
| Items | Contents |
| Input Voltage Accepted Range | DC 12V/0.5A DC 5~36V |

Industrial IP Modem M240 V4 Series



| Power Consumption | |
|------------------------------|---|
| Work Mode | Consumption |
| Communicating | 20~65mA @12VDC (2G:20~40 mA 4G:20~65mA) 20~95mA @9VDC (2G:30~45 mA 4G:20~95mA) |
| Standby | 15~30 mA @12VDC 20~40 mA @9VDC |
| Sleep | 5~17mA @12VDC 6~22mA @9VDC |
| Physical Properties | |
| Items | Contents |
| Casing | Metal casing, IP30 protection level, suitable for most industrial control applications. |
| Dimensions | 91x58.5x22mm (excluding antennas and mountings) |
| Weight | 205g |
| Others | |
| Items | Contents |
| Operating Temperature | -35~+75℃ |
| Storage Temperature | -40~+85℃ |
| Relative Humidity | 95% (non-condensing) |


Topology

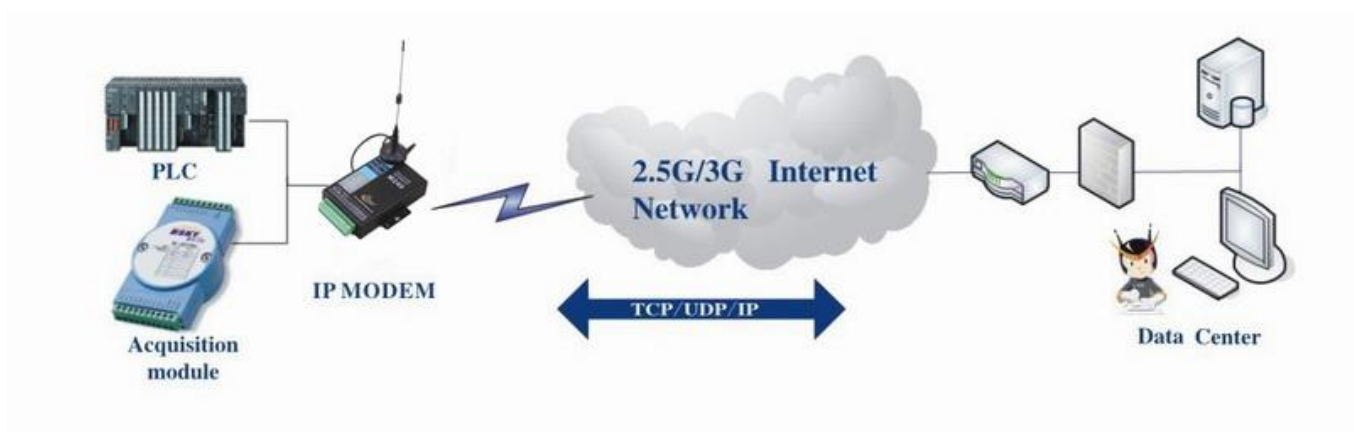

Industrial IP Modem M240 V4 Series



Dimension

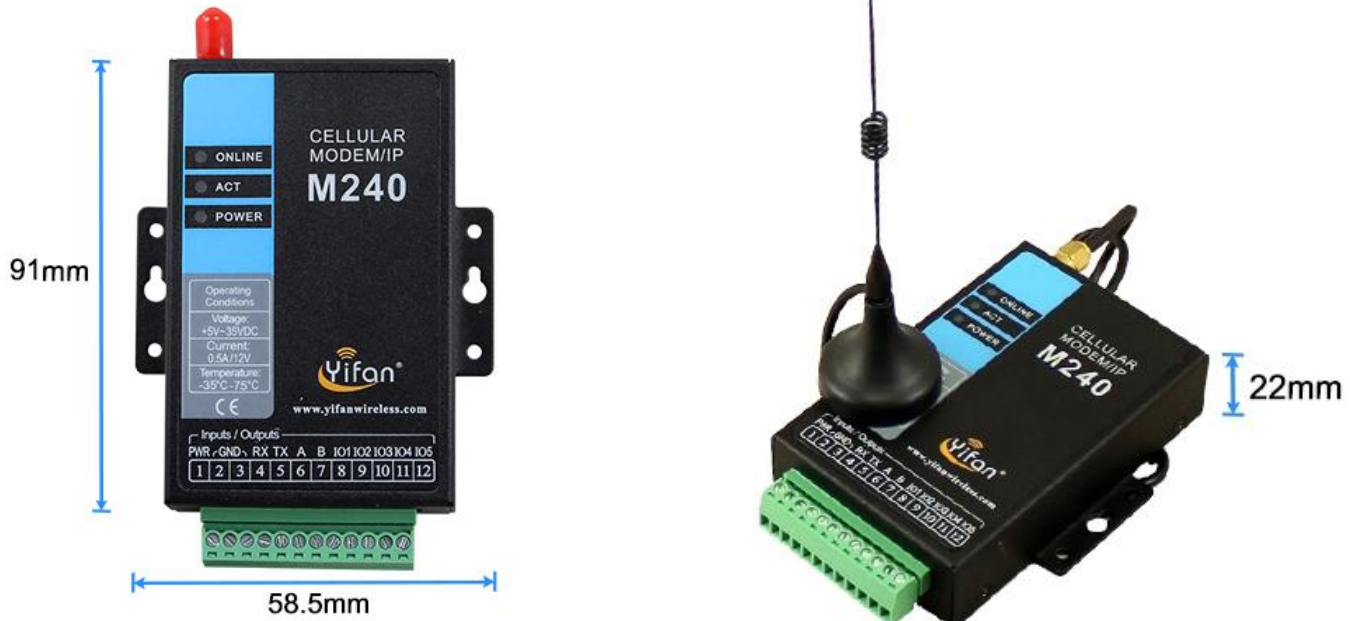

Order Information

| Models | Description | RS232 | RS485 | Cellular Antenna | SIM/UIM |
|------------|-------------------|-------|-------|------------------|---------|
| M240-L V4 | LTE CAT4 IP Modem | 1 | 1 | 1 | 1 |
| M240-L1 V4 | LTE CAT1 IP Modem | 1 | 1 | 1 | 1 |
| M240-G V4 | GPRS IP modem | 1 | 1 | 1 | 1 |