

YEACOMM HIGH SPEED 5G WIFI6 CPE NR330

Data Sheet



Yeacomm NR330 5G indoor CPE supports NR (SA&NSA), TDD-LTE and FDD-LTE cellular network, it comes with 1x2.5Gigabit WAN/LAN port, 1x1Gigabit LAN port and 2.4G/5G dual-band WIFI6 AX3600. This device is suitable for home and commercial scenarios that require rapid deployment of WIFI hotspots and wired broadband networks, it brings you high speed WiFi wherever you want.

Features



High Performance Processor

2.0Ghz high performance quad-core CPU ensures the high speed processing performance.



Ultra-fast 5G speed up to 4.67Gbps

It supports 5G/4G/3G full networks and SA&NSA modes. Built-in 6 cellular antennas ensure the best signal is received wherever it is placed.



Super-fast WiFi up to 3.6Gbps

Yeacomm NR330 5G CPE supports WiFi6 AX3600 and the WiFi speed is up to 3.6Gbps (2400Mbps on 5GHz and 1146Mbps on 2.4GHz).




Efficient Heat Dissipation

High conductivity materials, streamlined shape, top chimney design and cooling fan greatly improve the heat dissipation effect and ensure long time high-speed and stable operation.



Aesthetic Design and Portable Size

The aesthetic appearance makes NR330 5G CPE fit your surroundings nicely and neatly, portable size brings you the high-speed internet wherever you want.



Plug and Play


The device could automatically fix network problems in real-time without manually restarting or reconfiguring the network, makes it easier to access the Internet.

Technical Specifications


Cellular Parameters		
Frequency Band	EAU Market Standard Version: 5G NR: N1/N3/N5/N7/N8/N20/N28(a&b)/N38/N40/N41/N77/N78/N79 LTE: B1/B3/B5/B7/B8/B19/B20/28(a&b)/B32/B38/B40/B41/B42/B43/B46 WCDMA: B1/B5/B8 Optional Version: 5G NR:N1/N3/N5/N7/N8/N20/N28/N38/N40/N41/N75/N76/N77/N78 LTE: B1/B3/B5/B7/B8/B20/B28/B32/B38/B40/B41/B42/B43 WCDMA: B1/B5/B8	NA Market 5G NR:N2/N5/N7/N12/N14/N25/N30/N41/N48/N66/N71/N77/N78 LTE: B2/B4/B5/B7/B12/B13/B14/B17/B25/B26/B29/B30/B41/B46/B48/B66/B71 WCDMA: B2/B4/B5
MIMO	5G NR: DL 4x4 MIMO,UL 2x2 MIMO LTE: DL 4x4 MIMO	
Theoretical Bandwidth	5G NR: Downlink 4.67Gbps, uplink 1.25Gbps LTE Cat20: Downlink 1.6Gbps, uplink 211Mbps WCDMA/HSPA+: Downlink 42Mbps, uplink 11Mbps	
WIFI Parameters		
WIFI Protocol	IEEE802.11 a/b/g/n/ac/ax (WIFI 6)	
WIFI Frequency Band	2.4GHz+5GHz	
Theoretical Bandwidth	5GHz 4x4MIMO 11ax, 2.4Gbps	
Channel Bandwidth	20MHz, 40MHz, 80MHz, 80+80MHz	
Hardware		
CPU	2GHz Quad-Core CPU	
Flash	1GB	32GB
LPDDR4	1GB	2GB
Software		
Network Status	Signal strength Network type(5G/4G) SIM card status Wi-Fi Status LAN Status	
System Status	Mobile parameters, APN/DHCP/Wi-Fi information, Memory details, Version/Device information	
Internet Settings	Network mode setup, Data switch, Roaming setup	
APN Setup	APN name, Nat Switch on APN bear, PDP(IPV4/IPV6/IPV4V6), MTU size	
SIM Card	PIN Management SIM card Authentication	

DHCP Setup	Enable/disable DHCP server Configure DHCP IP Pool Configure DHCP Lease Time
Static Route	Route Setup on WAN/LAN interface
DDNS	Support
Band Lock	Support
PCI Lock	Support
Cell Lock	Support
Carrier SIM Lock	Support
VPN	PPTP, L2TP, IPSEC, Wireguard
Backup/restore	Encryption backup current settings and restore the backup settings (Export/Import Configuration)
Voice (Optional)	Support VoLTE and VoNR
Work Mode	NAT/ Router mode
Device Management	
Software Update	WebUI update TR069 update
TR069	HTTP/HTTPS Supports upload / download the ACS specified file Support download CPE configuration file Support configure & queries parameters Support remote upgrade Support cycle monitor
SNMP	Support
Diagnostics	Ping/Trace/Tcpdump Export current diagnosis results and operation logs
Power Supply	
Standard Power Supply	DC 12V/3A
Power Supply Range	DC 9~18V
Working Current	< 1.1A (12V)
Interfaces	
LAN/WAN Port	1 x 2.5Gigabit Ethernet (RJ45), auto MDI/MDIX
LAN Port	1 x 1Gigabit Ethernet (RJ45), auto MDI/MDIX
Phone Interface	1 x RJ11 port
Indicator	Signal, 5G, 4G, WIFI, Power
SIM/UIM Card	Nano-SIM, Compatible with eSIM card
Power Interface	Three-core DC locomotive power socket, built-in power reverse protection
USB Port	Type C 2.0
Reset Button	Reset the parameters to default setting
Physical Characteristics	
Outer Shell	ABS Material, protection level IP30
Dimensions	178x98x98 mm
Weight	680g
Operating Temperature	-10~+50°C
Storage Temperature	-40~+85°C
Humidity	95% (No-condensing)

Indicators&Interfaces

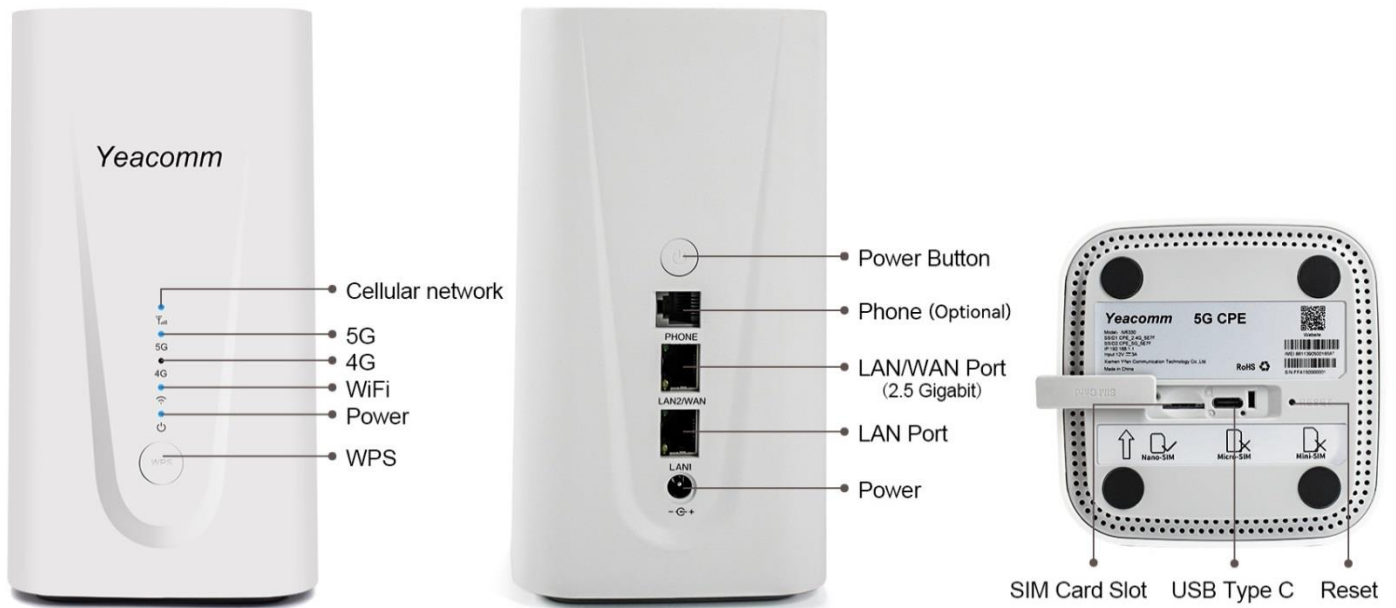

Enjoy High Speed Internet Wherever You Want

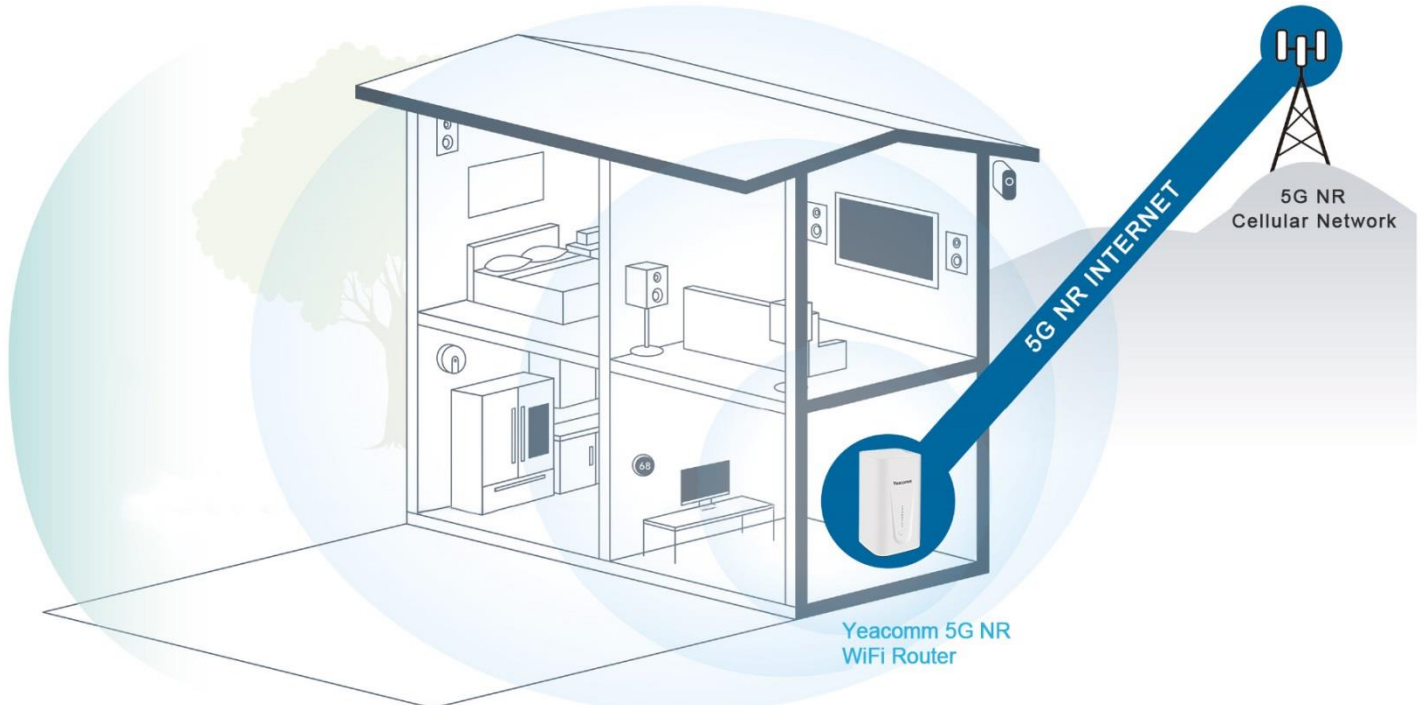

A

14th Floor,A06 Area,3rd Software Park, Jimei District, Xiamen, Fujian, China

C

P: +86-592-6101492
F: +86-592-5222813
E: admin@yifanwireless.com

W

www.yifanwireless.com